


Surface-mounted Spotlight

4.0011.15

- Protection class IP68 – for a water depth of up to 3 m
- Protection class IP69 - protection against high pressure and high jet water temperatures
- Entirely made of stainless steel 316Ti 1.4571
- Mounting foot adjustable through 180°
- ...
- POW-LED cold white, warm white, neutral white
- Multichip POW-LED RGB
- Operating mode: constant current
- Rotationally symmetric light distribution
- ...
- Cable pressure sleeve, V4A stainless steel
- Temperature-resistant silicon seal
- Toughened safety glass
- Supplied with UW-cable (3 m) already connected

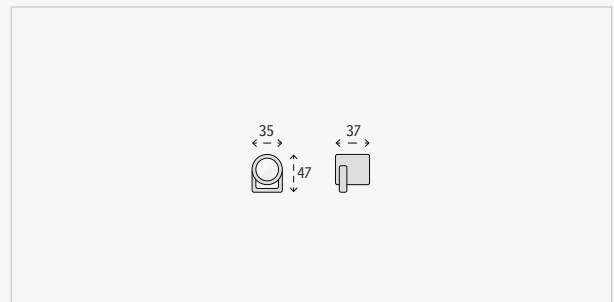

Additional parts

spike	Anti-glare ring
150 mm	V4A-Edelstahl,
4.0011.50.00	ø 40 mm, Länge 50 mm
	9.0011.00.70

Monochrome and dynamic illumination

Under- and overwater operations

#	Color	Lumen	LED	Watt	Power	Beam	Cable	Connect → 208
4.0011.15.01	6000K cold white	165 lm	1 POW-LED	total 2 W	CC 350 mA	10° spot	UW, 2x0,5 qmm	5.0635.65.03 max 3
4.0011.15.02	3000K warm white	135 lm						5.0635.65.20 max 4-12
4.0011.15.03	4500K neutral white	155 lm						5.0635.03.30 max 7 (14*)
								5.0635.03.31 max 7 (14*)

Underwater environments only

4.0011.15.09	RGB		1 Multichip POW-LED	all on 5 W	CC 350 mA	120° flood	UW, 6x0,5 qmm	5.0635.09.16 max 4 5.0635.09.24 max 5-8 5.0635.09.50 max 5-12
---------------------	-----	--	---------------------	------------	-----------	------------	---------------	---

Notes

- POW-LED with beam angle spot 10°, medium 30°, wide 45°, flood 90° and elliptical 15x40°
- POW-LED, series-connected
- SALINE version possible - Article number with an additional „S“ at the end

*Only for areas without people inside the water