


Recessed spotlight

4.0021

- Protection class IP67
- Cover made of stainless steel 316Ti
- Housing made of anodised aluminium
- Round or square attachment cover, height 3mm
- Toughened safety glass (ESG) – withstands loads of up to 650 kg
- ...
- POW-LED cold white, warm white, neutral white
- Operating mode: constant current
- ...
- For floor installation with a plastic installation container
- Supplied with plastic installation container and 3 m of connecting cable

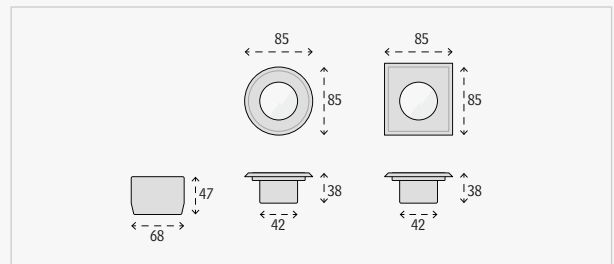

Monochrome illumination

Beam Angle medium

Cover	#	Color	Lumen	LED	Watt	Power	Beam	Cable	Temp.	Connect → 208
Round Cover	4.0021.20.01	6000K cold white	165 lm	1 POW-LED	total 2 W	CC 350 mA	30° medium	UW, 2x0,5 qmm	<40°C	5.0635.65.03 max 3 5.0635.65.20 max 12
	4.0021.20.02	3000K warm white	135 lm							
	4.0021.20.03	4500K neutral white	155 lm							
Square Cover	4.0021.40.01	6000K cold white	165 lm							
	4.0021.40.02	3000K warm white	135 lm							
	4.0021.40.03	4500K neutral white	155 lm							

Beam Angle homogen diffus

Round Cover	4.0020.20.01	6000K cold white	165 lm	1 POW-LED	total 2 W	CC 350 mA	homogen diffus	UW, 2x0,5 qmm	<40°C	5.0635.65.03 max 3 5.0635.65.20 max 12
	4.0020.20.02	3000K warm white	135 lm							
	4.0020.20.03	4500K neutral white	155 lm							
Square Cover	4.0020.40.01	6000K cold white	165 lm							
	4.0020.40.02	3000K warm white	135 lm							
	4.0020.40.03	4500K neutral white	155 lm							

Notes

- Beam Angle 45° and 10°
- POW-LED, series-connected
- Glass surface temperature below 40° (Cool Contact)