

Recessed spotlight

# 4.0026

In the home and garden, in hotels and many other applications, the small recessed floor spotlight with stainless steel cover, which is also used in wall areas, sets accents. Its particularly good cost-performance ratio is achieved by its sufficient lighting power combined with a cost effective investment. For easy and clean installation, it is supplied with a standard flush-mounted box. A diffuse spreading variant is available for orientation lighting on paths.



1:1 SCALE




4.0026 | Recessed spotlight

## Up to 495 lumen – Ideal as orientation light

- Protection class IP67
- Cover made of stainless steel 316Ti
- Housing made of anodised aluminium
- Round or square attachment cover, height 3 mm
- Toughened safety glass (ESG) – withstands loads of up to 650 kg
- ...
- POW-LED cold white, warm white, neutral white
- POW-LED RGB
- Operating mode: constant current
- ...
- For floor installation with a plastic installation container
- Supplied with plastic installation container and 3 m of connecting cable

### Typical applications

For the illumination of walls, the luminaires are used at a distance of about 1 metre with a small clearance from the wall. A lateral installation in the lower wall area is used for glare-free orientation lighting of public paths. For orientation lighting in open areas, the version with diffuse light distribution is used.

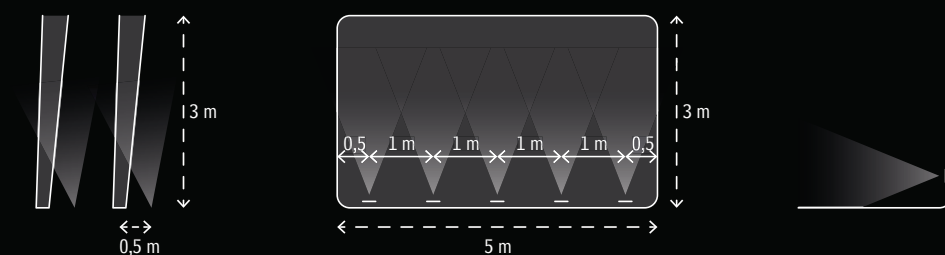



© Hofgut Liederbach, Liederbach, Germany



© Hofgut Liederbach, Liederbach, Germany

## 4.0026 | Recessed spotlight

### Colour temperatures



STANDARD				OPTIONS				
6000K cold white	4500K neutral white	3000K warm white	RGB	red	green	blue	yellow	2700 K

### Beam angles




STANDARD			OPTIONS		
medium 30° symmetrical	diffus	spot 10° symmetrical	wide 45° symmetrical	flood ≈120° symmetrical	wide x spot 40x15° elliptical

### Notes

- marine grade 316L stainless steel housing on request
- POW-LED, series-connected
- Glass surface temperature below 40° (Cool Contact)

### Dimensions

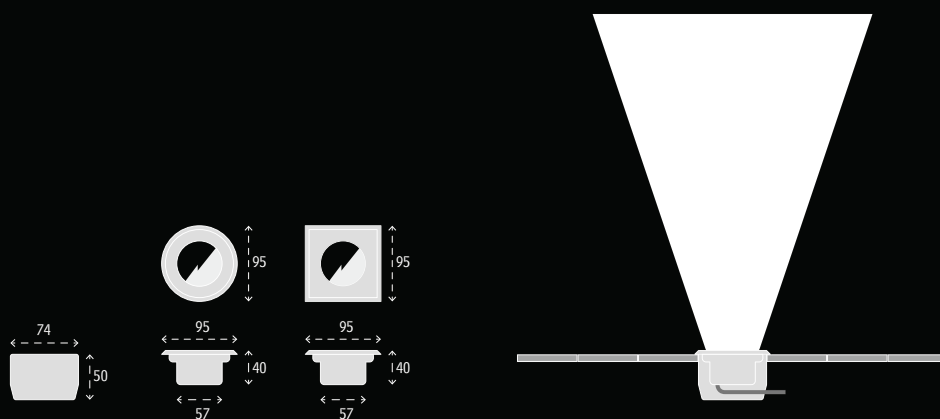



Monochrome illumination

Beam Angle 30° (medium)

Cover	#	Color	Lumen	Specifications	Control gear	Details
Round Cover	4.0026.20.11	6000K cold white	495 lm	LED 3 POW-LED	5.0635.65.03 max 1	→ 214
	4.0026.20.12	3000K warm white	405 lm	WATT total 5 W	5.0635.65.20 max 2-4	
	4.0026.20.13	4500K neutral white	465 lm	POWER CC 350 mA		
Square Cover	4.0026.40.11	6000K cold white	495 lm	BEAM 30° medium		
	4.0026.40.12	3000K warm white	405 lm	CABLE UW, 2x0,5 qmm		
	4.0026.40.13	4500K neutral white	465 lm	TEMP. < 40°C		

Beam Angle homogeneous diffuse

Cover	#	Color	Lumen	Specifications	Control gear	Details
Round Cover	4.0025.20.11	6000K cold white	165 lm	LED 1 POW-LED	5.0635.65.03 max 3	→ 214
	4.0025.20.12	3000K warm white	135 lm	WATT total 2 W	5.0635.65.20 max 5-12	
	4.0025.20.13	4500K neutral white	155 lm	POWER CC 350 mA		
Square Cover	4.0025.40.11	6000K cold white	165 lm	BEAM homogen diffus		
	4.0025.40.12	3000K warm white	135 lm	CABLE UW, 2x0,5 qmm		
	4.0025.40.13	4500K neutral white	155 lm	TEMP. < 40°C		

Dynamic illumination

Beam Angle 30° (medium)

Cover	#	Color	Lumen	Specifications	Control gear	Details
Round Cover	4.0026.20.19	RGB		LED 3 POW-LED	5.0635.09.16 max 4	→ 220
Square Cover	4.0026.40.19	RGB		WATT all on 5 W	5.0635.09.50 max 5-12	
				POWER CC 350 mA		
				BEAM 30° medium		
				CABLE UW, 6x0,5 qmm		
				TEMP. < 40°C		

Beam Angle omogeneous diffuse

Cover	#	Color	Lumen	Specifications	Control gear	Details
Round Cover	4.0025.20.19	RGB		LED 1 Multichip POW-LED	5.0635.09.16 max 4	→ 220
Square Cover	4.0025.40.19	RGB		WATT all on 5 W	5.0635.09.50 max 5-12	
				POWER CC 350 mA		
				BEAM diffus		
				CABLE UW, 6x0,5 qmm		
				TEMP. < 40°C		