


## Linear Recessed-Light

# 4.1010

- Protection class IP67
- Flush mounted linear lighting fixture
- Entirely made of stainless steel 316Ti 1.4571
- Fully encapsulated
- ...
- Low-Power-LED cold white, warm white, neutral white, CV
- Operating mode: constant voltage
- ...
- Installation without any gap of numerous fixtures possible, line of light without any gaps
- Anti-slip toughened safety glass (ESG)
- Connection with special cable connectors (plug and socket)
- 250mm and 1000mm versions available
- External driver (to be ordered separately according to project needs!)
- Recessing box for ground and wall mounting available in T shape
- Delivery with 2 x 0,5 m cable for junction to next lighting fixture
- ...

- VERSION OL: Orientation lighting fixture
- Completely homogenous light distribution
  - Suitable for accentuation and orientation lighting
  - ...

- VERSION LL: linear lighting fixture
- Smooth light distribution with visible LED dots
  - Suitable for lighting of walls and facades

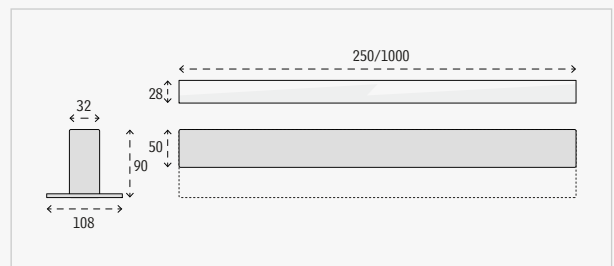

## Additional parts

Junction element for cross-, T- and L-junctions, stainless steel <b>9.1010.00.01</b>	Junction element for linear junctions, stainless steel <b>9.1010.01.01</b>	Dismantling tool <b>9.1010.00.40</b>
Connection plug <b>9.1010.00.30</b>	Connection socket <b>9.1010.01.30</b>	

## Notes

- Monochrome SMD-LED available in red, green, blue, yellow
- SMD-LED RGB available
- other lengths available on request
- An installation housing is required for a new installation. Please order separately.
- Project/installation details required.
- Request power supplies project-related (DALI, DMX)
- Junction element order separately

## Monochrome illumination

### Length 250 mm

Cover	#	Color	Lumen	LED	Watt	Power	Beam	Cable	Temp.	Connect → 208
version OL: Orientation Light - length 250 mm	<b>4.1025.10.01</b>	6000K	270 lm	SMD-LED cold white	total 3 W	24 V-DC	diffus	UW, 2x1,0 qmm	<40°C	5.1010.65.20 max 6 5.1010.65.60 max 18
	<b>4.1025.10.02</b>	3000K	250 lm	SMD-LED warm white						
	<b>4.1025.10.03</b>	4500K	270 lm	SMD-LED neutral white						
version LL: linear lighting fixture - length 250 mm	<b>4.1025.10.11</b>	6000K	270 lm	SMD-LED cold white						
	<b>4.1025.10.12</b>	3000K	250 lm	SMD-LED warm white						
	<b>4.1025.10.13</b>	4500K	270 lm	SMD-LED neutral white						

### Length 1000 mm

version OL: Orientation Light - length 1000 mm	<b>4.1010.10.01</b>	6000K	1100 lm	SMD-LED cold white	total 10 W	24 V-DC	diffus	UW, 2x1,0 qmm	<40°C	5.1010.65.20 max 2 5.1010.65.60 max 5
	<b>4.1010.10.02</b>	3000K	1000 lm	SMD-LED warm white						
	<b>4.1010.10.03</b>	4500K	1100 lm	SMD-LED neutral white						
version LL: linear lighting fixture - length 1000 mm	<b>4.1010.10.11</b>	6000K	1100 lm	SMD-LED cold white						
	<b>4.1010.10.12</b>	3000K	1000 lm	SMD-LED warm white						
	<b>4.1010.10.13</b>	4500K	1100 lm	SMD-LED neutral white						

## Installation housings

<b>4.1025.00.00</b>	<b>4.1025.01.00</b>	<b>4.1010.00.00</b>	<b>4.1010.01.00</b>
Installation housing out of 316L stainless steel, T-Version, for 4.1025, length 250 mm	Installation housing out of 316L stainless steel, L-Version, for 4.1025, length 250 mm	Installation housing out of 316L stainless steel, T-Version, for 4.1010, length 1000 mm	Installation housing out of 316L stainless steel, L-Version, for 4.1010, length 1000 mm