



OUTDOOR-FLOODLIGHT

IP54







EXCL.

CABLE
INCL.



- Protection system IP54
- (6.0152) with one holder for wall and ceiling installation, available in black and white
- (6.0158) wall bars with 2 holders, for wall or ceiling installation, available in black and white
- (6.0164) wall bars with 3 holders, for wall or ceiling installation, available in black
- (6.1500) one holder, length 750 mm, available in black and white
- (6.1600) one holder, length 1000 mm, available in black and white
- Supplied without light source

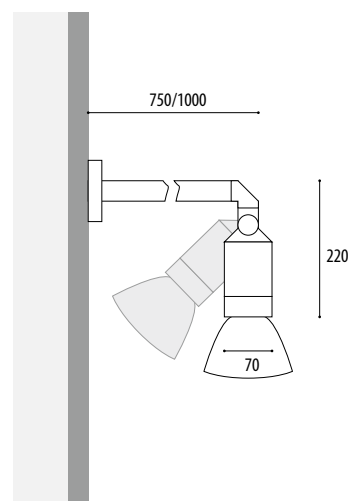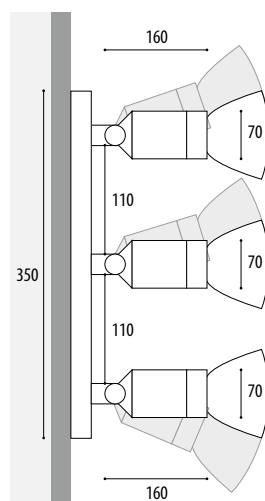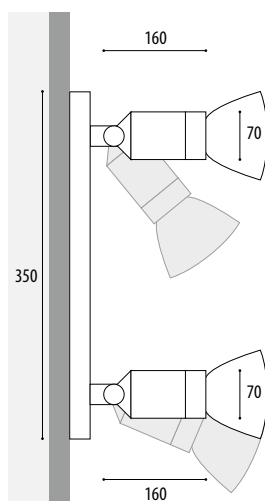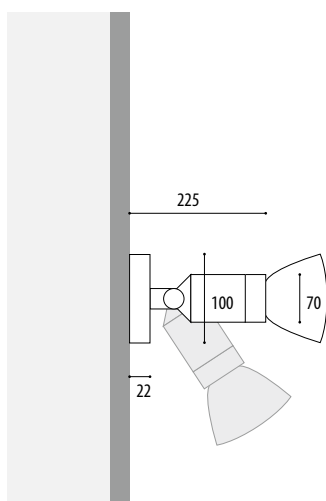

Article number	Lamps	Wattage	V/mA	Socket	Radiation angle
WITH ONE HOLDER FOR WALL AND CEILING INSTALLATION, AVAILABLE IN BLACK AND WHITE					
6.0150.01.84 black	PAR38	120W	230V	E27	30°
6.0150.02.84 white	PAR38	80W	230V	E27	30°
WALL BARS WITH 2 HOLDERS, FOR WALL OR CEILING INSTALLATION, AVAILABLE IN BLACK AND WHITE					
6.0158.01.84 black	PAR38	120W	230V	E27	30°
6.0158.02.84 white	PAR38	80W	230V	E27	30°
WALL BARS WITH 3 HOLDERS, FOR WALL OR CEILING INSTALLATION, AVAILABLE IN BLACK					
6.0164.01.84 black	PAR38	120W	230V	E27	30°
ONE HOLDER, LENGTH 750 MM, AVAILABLE IN BLACK AND WHITE					
6.1500.01.84 black	PAR38	120W	230V	E27	30°
6.1500.02.84 white	PAR38	80W	230V	E27	30°
ONE HOLDER, LENGTH 1000 MM, AVAILABLE IN BLACK AND WHITE					
6.1600.01.84 black	PAR38	120W	230V	E27	30°
6.1600.02.84 white	PAR38	80W	230V	E27	30°